Roger Dex
183 Tillie Square, Markham, ON L3S 3S1, Canada
+1 (647) 807-8529

Proposal for a 10.4 kW solar project

Option 1

Roger Dex
+1 (647) 807-8529

183 Tillie Square,
Markham, ON L3S 3S1, Canada

Company
Solar Power Store Canada
+1 (888) 421-5354
solarpowerstore.ca
526 Bryne Dr unit c, Barrie, ON L4N 9P6, Canada
Rozen@solarpowerstore.ca

Your energy consultant
Rozen Sosnovsky
Rozen@solarpowerstore.ca
888-421-5354

Generated date: November 12th, 2024

Roger Dex
183 Tillie Square, Markham, ON L3S 3S1, Canada
+1 (647) 807-8529

Solar details

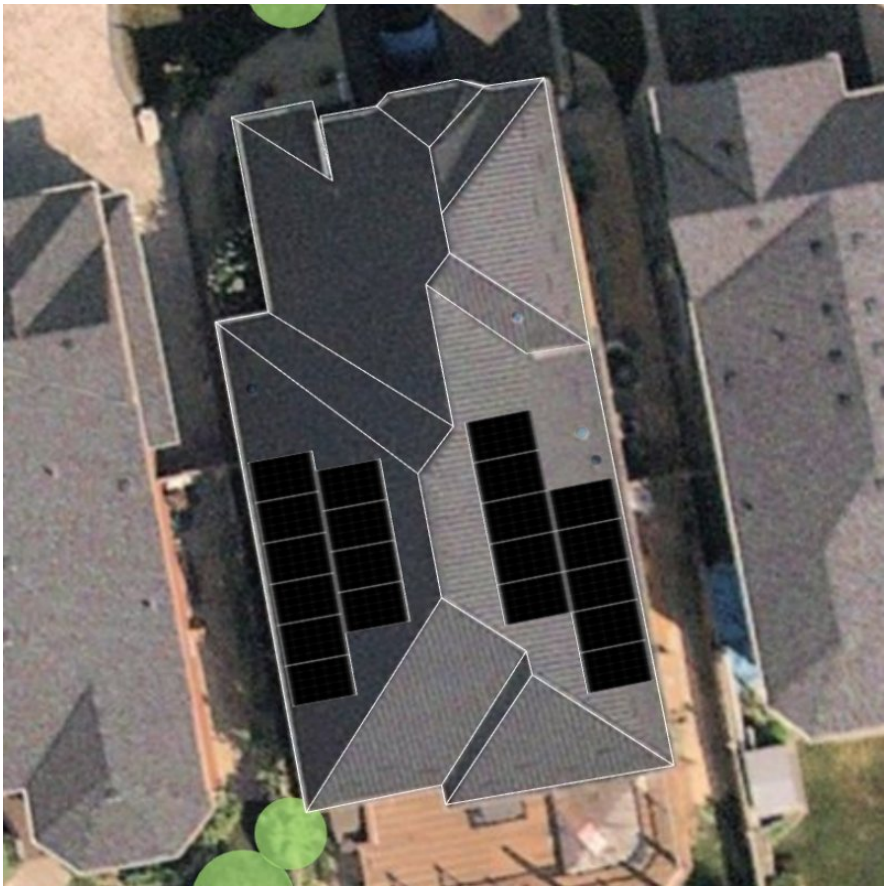

System size
10.4 kW DC

Panels
SPML520W
Inverters
BDM-2000

CEC-AC rating
8.905 kW AC

AC rated power output
10 kW AC

Estimated First Year Production
11,148 kWh

Consumption Offset
88%

Array details

Panel: SPML520W

Quantity: 6	**Watts:** 520	**Azimuth:** 260° (W)	**Tilt:** 31.8°	**Mounting:** flush

Panel: SPML520W

Quantity: 10	**Watts:** 520	**Azimuth:** 79° (E)	**Tilt:** 29.17°	**Mounting:** flush

Panel: SPML520W

Quantity: 4	**Watts:** 520	**Azimuth:** 260° (W)	**Tilt:** 31.8°	**Mounting:** flush

Roger Dex
183 Tillie Square, Markham, ON L3S 3S1, Canada
+1 (647) 807-8529

Buy Option

Old utility bill	$150.00/month
Estimated new utility bill	$55.87/month
Estimated bill difference	$94.13/month

#Actual new utility bill may vary if there are changes in utility rates, adjustments to energy usage, or modifications to the consumption profile.

Roger Dex
183 Tillie Square, Markham, ON L3S 3S1, Canada
+1 (647) 807-8529

Pricing

	Price	Discounts & rebates	Total price
Base Price for Solar Based on a 10.4 kW installation	**$20,800.00** $2.00/watt		
Gross Cost	**$20,800.00**	**-$0.00**	**$20,800.00**
Winter Sale (-5% off) 1 x -$1,040.00		**-$1,040.00**	
Cost after rebates & incentives*	**$20,800.00**	**-$1,040.00**	**$19,760.00**

Note:
* Not everyone is eligible for credits, incentives, or rebates or can fully use them. Please consult your tax professional or legal professional for further information.
* All prices are in Canadian dollars.
** Incentives are subject to change. The actual amount can be higher or lower than what is quoted, and may not stay at a fixed rate over time. It can also change based on the tax bracket you are in.

Roger Dex
183 Tillie Square, Markham, ON L3S 3S1, Canada
+1 (647) 807-8529

Materials

Maple Leaf Solar - SPML520W

Quantity **20**
Type: **mono**
Wattage: **520 Watts**



Download

NEP - BDM-2000

Quantity **5**
Type: **micro**
Rated AC power output: **2000 Watts**

Download

Roger Dex
183 Tillie Square, Markham, ON L3S 3S1, Canada
+1 (647) 807-8529

Previous Projects

Jerome G. | Wasaga Beach, Ontario

"Sapir and his team at Solar Power Store really helped guide me through the project with all of the correct drawings, permits required, and a thorough installation. They made sure I got exactly what I needed from this solar system." - Jerome

8.8kw Grid-Tied | Barry's Bay, ON

In the picturesque town of Barry's Bay, Ontario, the winds of change are sweeping through. This remarkable project, featuring an 8.8kW solar system with 16 Jinko solar panels and an 8kW Hoymiles microinverter, exemplifies the incredible potential of grid-tied solar installations in driving financial returns and promoting sustainability.

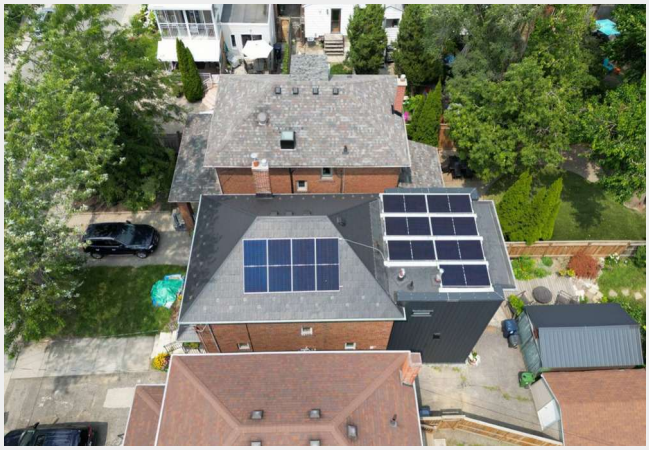

Anton P | East York, ON

Anton made a decision that not only aligned with his eco-friendly values but also promised substantial financial benefits. With the help of Solar Power Store Canada, Anton embarked on a journey towards energy independence and a brighter future. This is the story of how a complete grid-tied solar system became Anton's ticket to free electricity in just 7 years.

Roger Dex
183 Tillie Square, Markham, ON L3S 3S1, Canada
+1 (647) 807-8529

Usage Breakdown

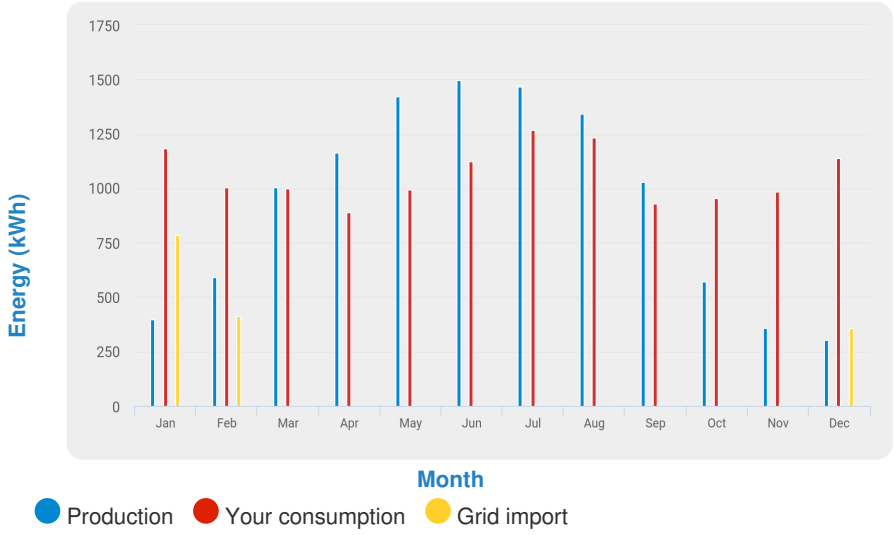

Consumption Offset

88%

Estimated First Year Consumption
12,703.8 kWh

Estimated First Year Production
11,148.0 kWh

Note: The consumption profile used for this proposal assumes peak consumption in morning and evening hours

Estimated Savings

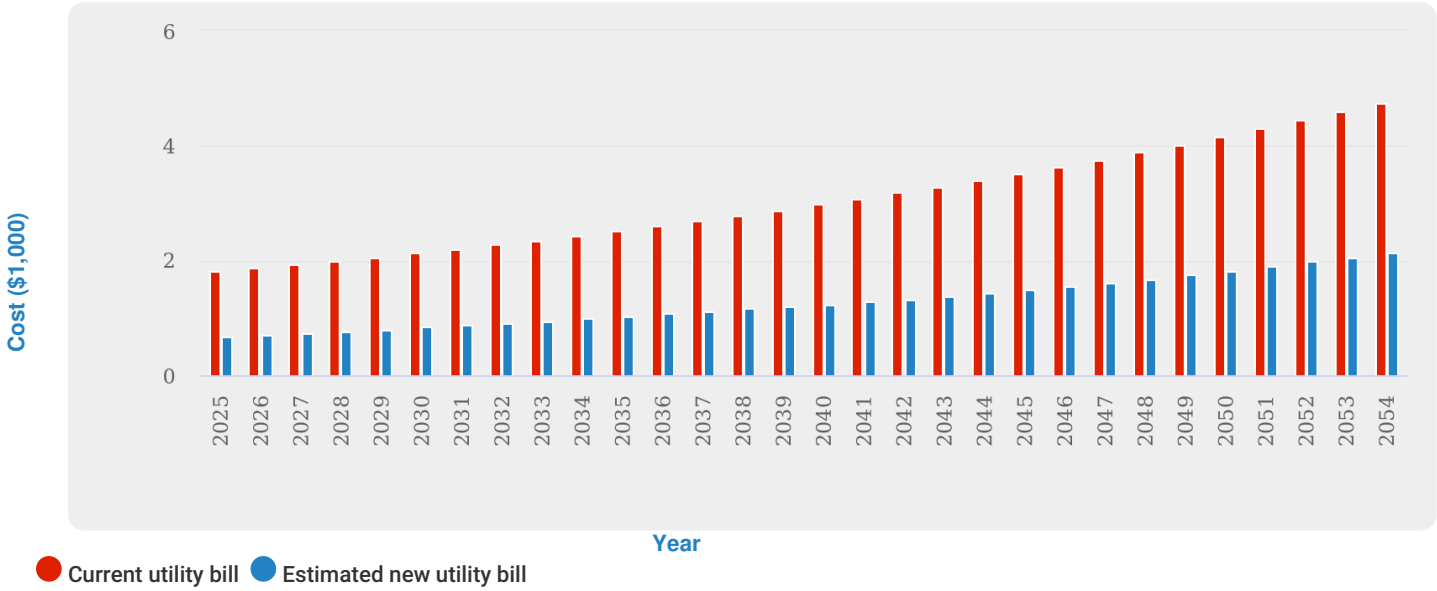

Assuming a 3.40% escalation rate on utility rate

Levelised energy costs	Net savings
$0.06	$33,289.27

Estimated Solar Savings Over 30 Years
$53,049.27

Roger Dex
183 Tillie Square, Markham, ON L3S 3S1, Canada
+1 (647) 807-8529

Month-by-month details

Month (2025)	Production AC (kWh)	Grid usage (kWh)	New utility bill	Net credits (kWh)	Net savings
Jan	398.8	785.73	$111.33	0	$56.51
Feb	590.25	411.89	$58.36	0	$83.63
Mar	1,002.95	0	$50.00	1.8	$91.85
Apr	1,162.55	0	$50.00	274.7	$75.80
May	1,420.17	0	$50.00	428.3	$90.54
Jun	1,494.95	0	$50.00	372.7	$109.01
Jul	1,468.4	0	$50.00	198.3	$129.96
Aug	1,342.59	0	$50.00	108.5	$124.86
Sep	1,030.48	0	$50.00	98.7	$82.03
Oct	571.94	0	$50.00	-381	$85.02
Nov	359.23	0	$50.00	-627.4	$89.79
Dec	305.7	358.18	$50.75	-474.6*	$110.56
Total	**11,148.0 kWh**	**1,555.8 kWh**	**$670.44**	**$0.00**	**$1,129.56**

* For Net Savings, the cash price is not included in the monthly breakdown because it is assumed that it will be paid upfront (Month 0).

Roger Dex
183 Tillie Square, Markham, ON L3S 3S1, Canada
+1 (647) 807-8529

Project Timeline

Date	Step	Details	Charge
November 15, 2024	Contract signature	File opening and centralizing all information	$500.00
November 20, 2024	Site assessment	Complete site evaluation & final measurements	
December 10, 2024	Permits and applications	Completing paperwork for incentives and regulatory steps	
December 17, 2024	Payment for equipment	Full payment for equipment at least 7 days before job starts	
December 24, 2024	INITIAL DEPOSIT-Labour	Delivering materials to location, installation and wiring	$2,889.00 (15%)
December 24, 2024	FINAL INSPECTION AND APPROVAL	ESA/AHJ inspection and approval	$2,889.00 (15%)

Roger Dex
183 Tillie Square, Markham, ON L3S 3S1, Canada
+1 (647) 807-8529

Benefits of Solar

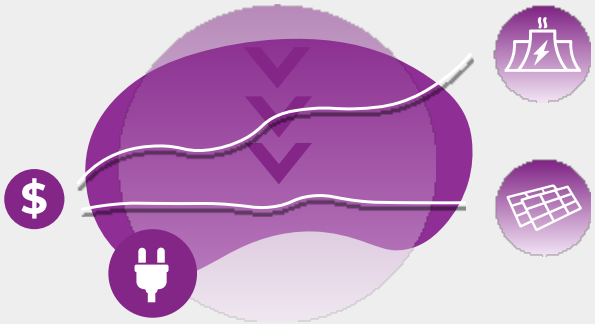

Control your energy costs

As utility prices continue to climb you will enjoy predictable energy costs for years to come.

Increase the value of your property

A number of real estate studies find that solar is a home improvement that may increase the market value of your property.

Benefit your environment

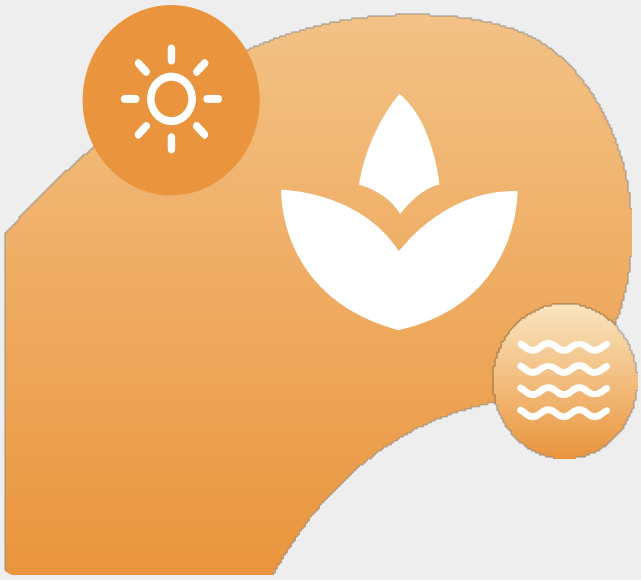

96,603

Litres of gasoline saved

9,651

Trash bags of waste recycled

3,780

Tree seedlings grown for 10 years

113,295

Kilograms of coal saved

Roger Dex
183 Tillie Square, Markham, ON L3S 3S1, Canada
+1 (647) 807-8529

Signature

I hereby agree to move forward with the solar project as described above.

Roger Dex	**Date of signature (MM-DD-YYYY)**

Solar Power Store Canada	**Date of signature (MM-DD-YYYY)**